

# MACHINE PROTECTION FOXTROT



## Technical Information

Tested to withstand force of (Joule)	2.500 J
Vehicle weight equivalent (kg)	2.000 kg
Vehicle equivalent speed (km/h)	5,7 km/h
Equivalent angle of impact	90°
Deflection zone	250 mm

## Material Properties


Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

## Environment


CO2 / m <sup>3</sup>	18,5 kg
Recyclability	100%

## Other

Standard Warranty 5 years



**TÜV Approved**

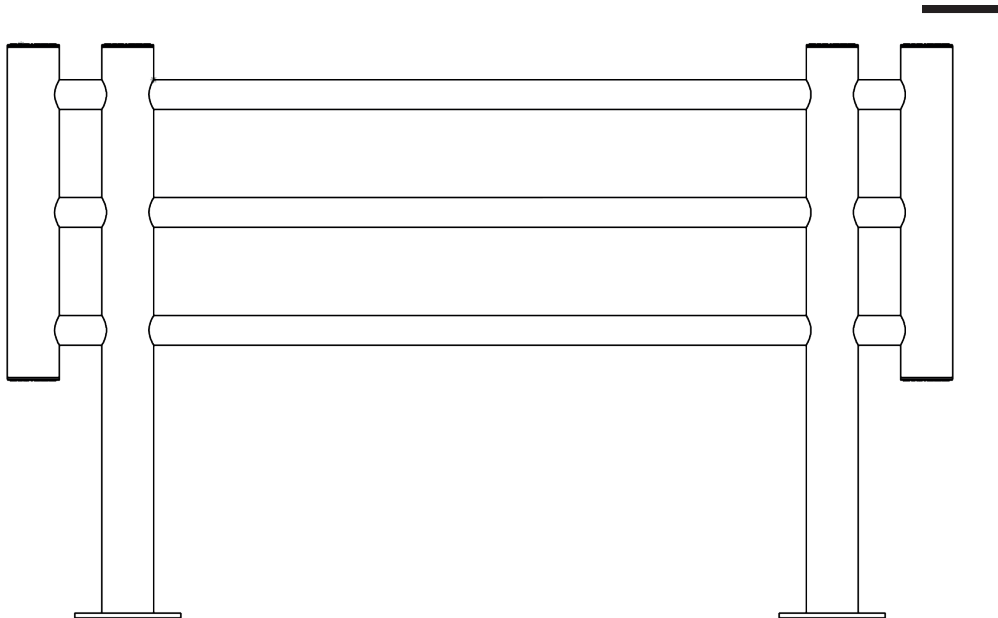

**Testcenter Video**


Art. No.	Description	Width	Weight
DFFS-FU1	Machine protective fencing	1000 mm	17,0 kg
DFFS-FU2	Machine protective fencing	1500 mm	19,0 kg
DFFS-FU3	Machine protective fencing	2000 mm	22,0 kg
<b>The following item is not TÜV tested</b>			
DFFS-SP	Slider plate 330 x 230 mm, material: steel		4,4 kg

<b>Article description</b>	Machine protection Fixed Unit 1 m
<b>Item number</b>	DFFS-FU1
<b>EAN</b>	4250912311282
<b>Customs tariff number</b>	39269097
<b>Height</b>	1200 mm
<b>Width</b>	225 mm
<b>Length</b>	1000 mm
<b>Diameter</b>	110 mm
<b>Deflection zone</b>	250 mm
<b>Net weight</b>	17 kg
<b>Material</b>	Polyethylene
<b>Color</b>	Yellow (like RAL 1023 traffic yellow) / black
<b>Indoor use</b>	Yes
<b>Outdoor use</b>	Yes
<b>Boreholes</b>	8
<b>Fixing</b>	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
<b>Fixing dimensions</b>	M10X70



**Material Properties**

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°


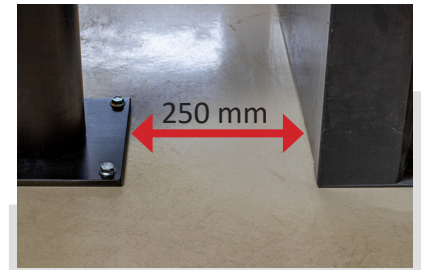


**Environment**

CO2 / m³	18,5 kg
Recyclability	100%

**Other**

Standard Warranty	5 years
-------------------	---------

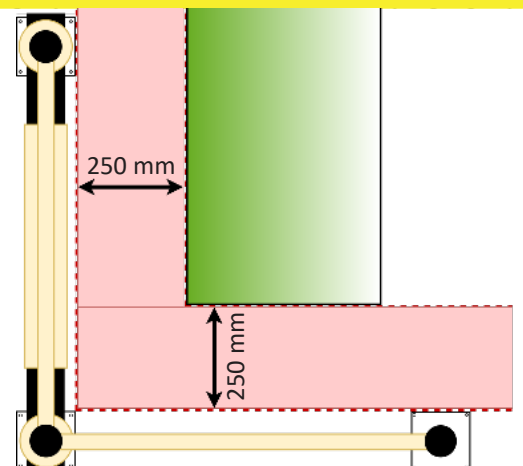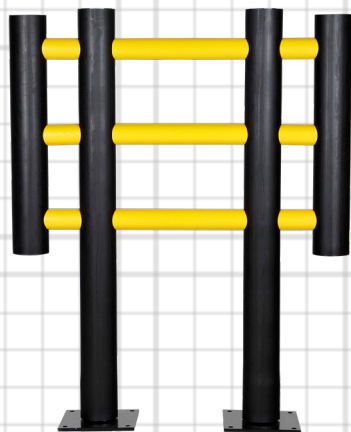

<b>Article description</b>	Machine protection Fixed Unit 1,5 m
<b>Item number</b>	DFFS-FU2
<b>EAN</b>	4250912311299
<b>Customs tariff number</b>	39269097
<b>Height</b>	1200 mm
<b>Width</b>	225 mm
<b>Length</b>	1500 mm
<b>Diameter</b>	110 mm
<b>Deflection zone</b>	250 mm
<b>Net weight</b>	19 kg
<b>Material</b>	Polyethylene
<b>Color</b>	Yellow (like RAL 1023 traffic yellow) / black
<b>Indoor use</b>	Yes
<b>Outdoor use</b>	Yes
<b>Boreholes</b>	8
<b>Fixing</b>	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
<b>Fixing dimensions</b>	M10X70



**Material Properties**

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°





**Environment**

CO2 / m <sup>3</sup>	18,5 kg
Recyclability	100%

**Other**

Standard Warranty 5 years

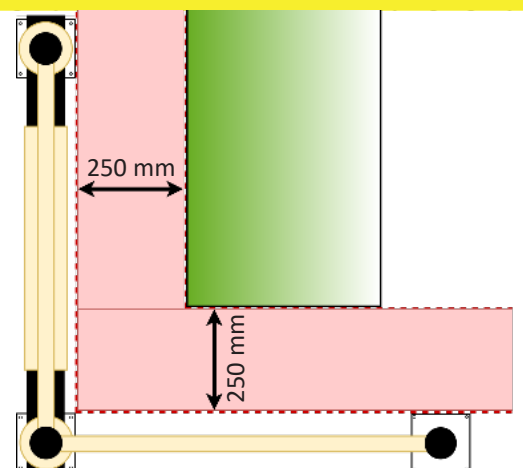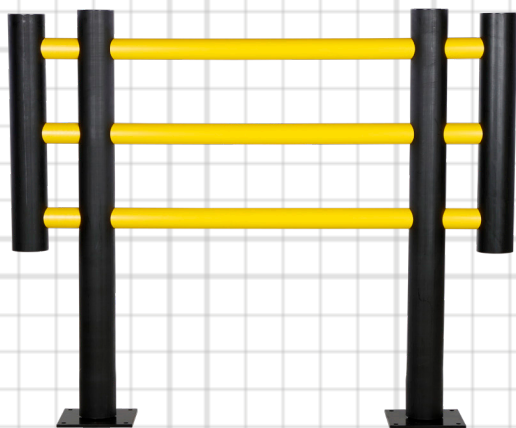


<b>Article description</b>	Machine protection Fixed Unit 2 m
<b>Item number</b>	DFFS-FU3
<b>EAN</b>	4250912311305
<b>Customs tariff number</b>	39269097
<b>Height</b>	1200 mm
<b>Width</b>	225 mm
<b>Length</b>	2000 mm
<b>Diameter</b>	110 mm
<b>Deflection zone</b>	250 mm
<b>Net weight</b>	22 kg
<b>Material</b>	Polyethylene
<b>Color</b>	Yellow (like RAL 1023 traffic yellow) / black
<b>Indoor use</b>	Yes
<b>Outdoor use</b>	Yes
<b>Boreholes</b>	8
<b>Fixing</b>	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
<b>Fixing dimensions</b>	M10X70



**Material Properties**

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

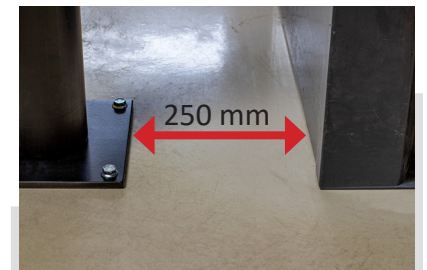

**Environment**

CO2 / m <sup>3</sup>	18,5 kg
Recyclability	100%

**Other**

Standard Warranty 5 years

