

# KERB BARRIER MIKE



## Technical Information

Deflection zone 100 mm

## Material Properties

Chemical Resistance high- ISO/TR 10358


Temperature Range -10° up to + 50°

## Environment

Recyclability 100%

## Other

Standard Warranty 5 years

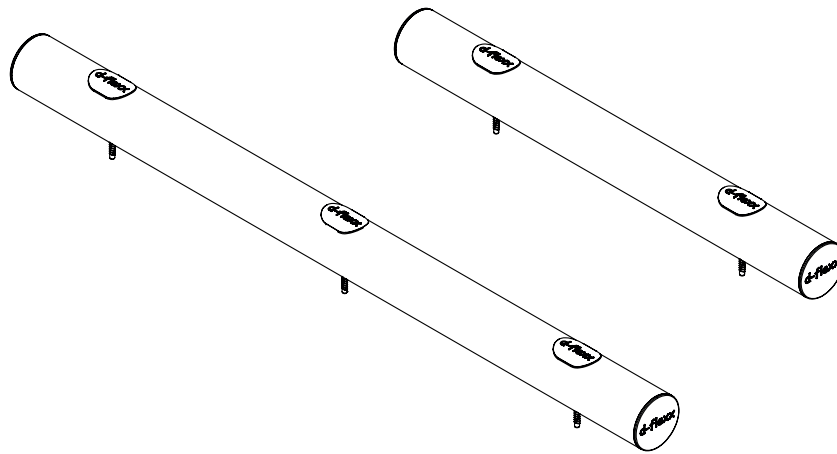

Art. No.	Description	Weight
DFKB-1	Kerb Barrier 1300 mm	5,9 kg
DFKB-2	Kerb Barrier 2000 mm	8,5 kg
DFKB-3	Kerb Barrier 1500 mm	6,8 kg
DFKB-4	Kerb Barrier 1000 mm	4,9 kg
DFKB-I	Kerb Barrier individual 400 - 1499 mm	
DFKB-I2	Kerb Barrier individual 1500 - 2000 mm	
DFKB-5	Kerb Barrier 500 mm	3,2 kg

**Article description** Kerb Barrier 1300 mm  
**Item number** DFKB-1  
**EAN** 4250912395619  
**Customs tariff number** 39269097




**Height** 140 mm  
**Width** 140 mm  
**Length** 1300 mm  
**Diameter** 140 mm  
**Deflection zone** 100 mm

**Net weight** 5,9 kg  
**Material** Polyethylene  
**Color** Yellow (like RAL 1018 traffic yellow) / black  
**Indoor use** Yes  
**Outdoor use** Yes  
**Boreholes** 2  
**Fixing** The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.  
**Fixing dimensions** M12X85



**Material Properties**

**Chemical Resistance** high- ISO/TR 10358  
**Temperature Range** -10° up to + 50°

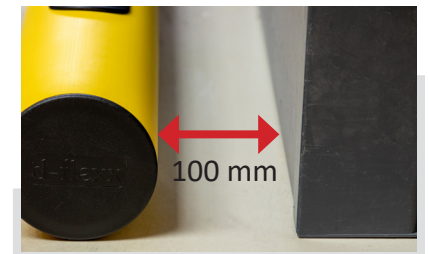


**Environment**

**Recyclability** 100%

**Other**

**Standard Warranty** 5 years

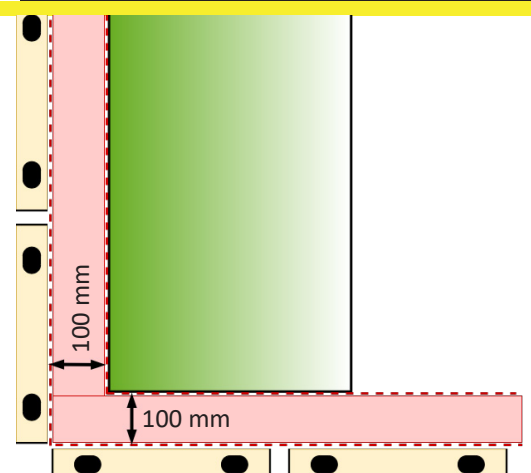

**Article description** Kerb Barrier 2000 mm  
**Item number** DFKB-2  
**EAN** 4250912395626  
**Customs tariff number** 39269097




**Height** 140 mm  
**Width** 140 mm  
**Length** 2000 mm  
**Diameter** 140 mm  
**Deflection zone** 100 mm

**Net weight** 8,5 kg  
**Material** Polyethylene  
**Color** Yellow (like RAL 1018 traffic yellow) / black  
**Indoor use** Yes  
**Outdoor use** Yes  
**Boreholes** 3  
**Fixing** The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.  
**Fixing dimensions** M12X85



**Material Properties**

**Chemical Resistance** high- ISO/TR 10358  
**Temperature Range** -10° up to + 50°


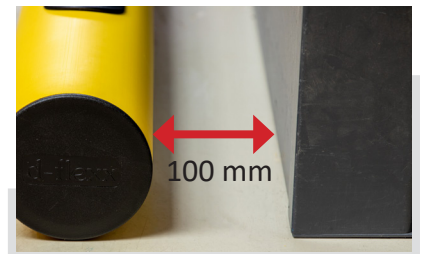


**Environment**

**Recyclability** 100%

**Other**

**Standard Warranty** 5 years

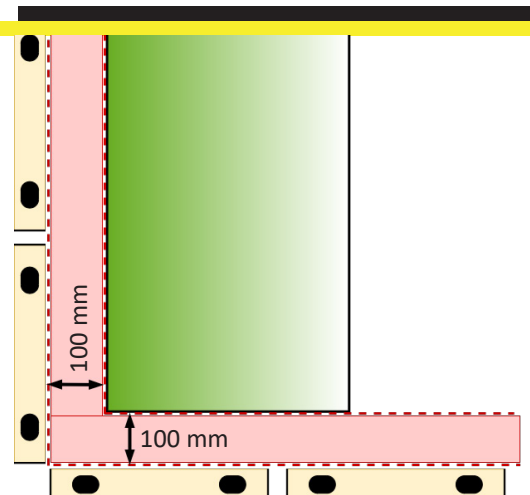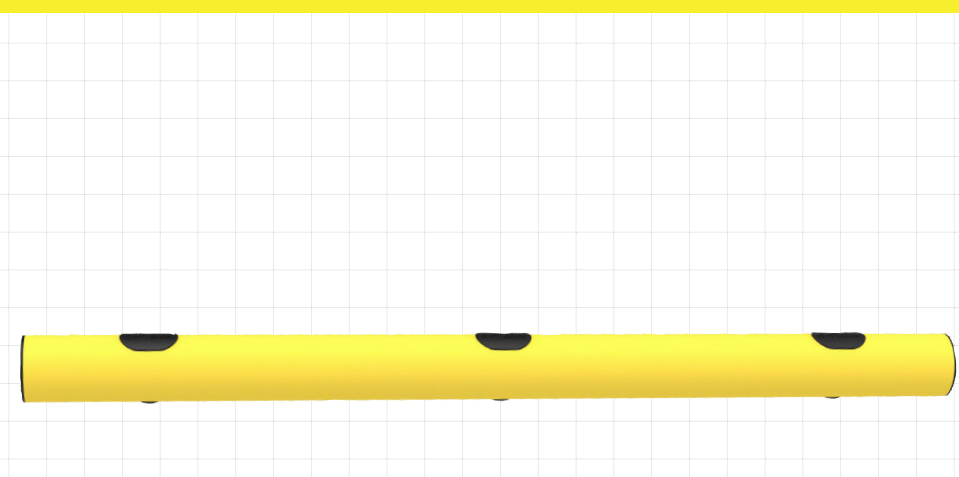

**Article description** Kerb Barrier 1500 mm  
**Item number** DFKB-3  
**EAN** 4250912395657  
**Customs tariff number** 39269097



**Height** 140 mm  
**Width** 140 mm  
**Length** 1500 mm  
**Diameter** 140 mm  
**Deflection zone** 100 mm

**Net weight** 6,8 kg

**Material** Polyethylene

**Color** Yellow (like RAL 1018 traffic yellow) / black

**Indoor use** Yes

**Outdoor use** Yes

**Boreholes** 3


**Fixing** The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

**Fixing dimensions** M12X85



**Material Properties**

**Chemical Resistance** high- ISO/TR 10358  
**Temperature Range** -10° up to + 50°

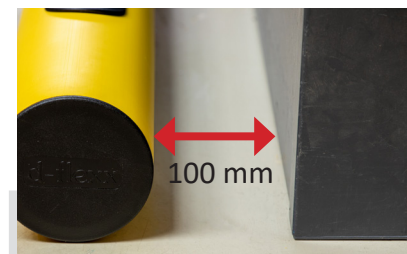


**Environment**

**Recyclability** 100%

**Other**

**Standard Warranty** 5 years

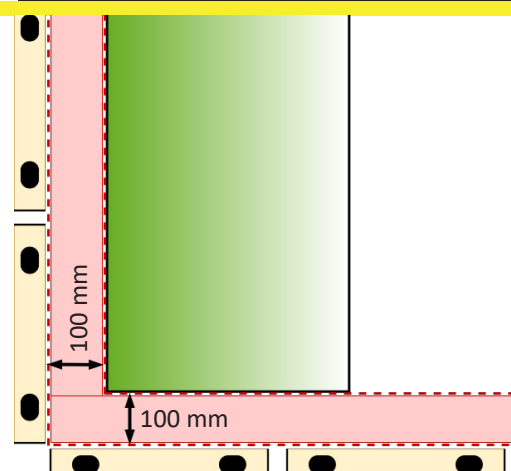

**Article description** Kerb Barrier 1000 mm  
**Item number** DFKB-4  
**EAN** 4250912395664  
**Customs tariff number** 39269097




**Height** 140 mm  
**Width** 140 mm  
**Length** 1000 mm  
**Diameter** 140 mm  
**Deflection zone** 100 mm

**Net weight** 4,9 kg  
**Material** Polyethylene  
**Color** Yellow (like RAL 1018 traffic yellow) / black  
**Indoor use** Yes  
**Outdoor use** Yes  
**Boreholes** 2  
**Fixing** The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.  
**Fixing dimensions** M12X85



**Material Properties**

**Chemical Resistance** high- ISO/TR 10358  
**Temperature Range** -10° up to + 50°

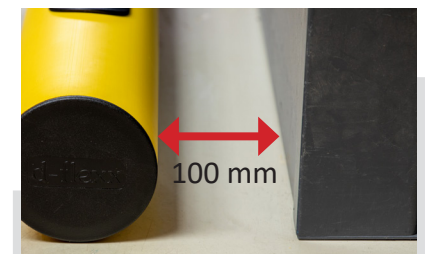


**Environment**

**Recyclability** 100%

**Other**

**Standard Warranty** 5 years

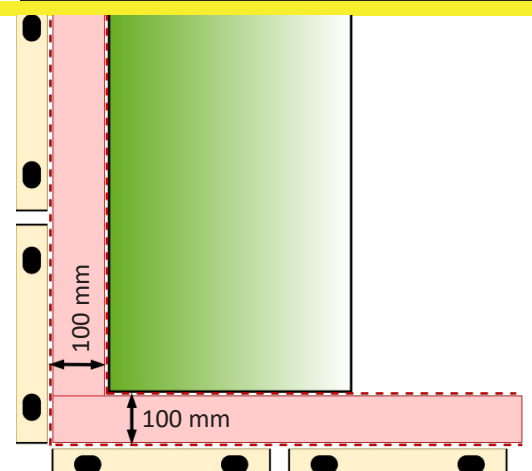

**Article description** Kerb Barrier individual length 400- 1499 mm  
**Item number** DFKB-I  
**EAN** 4250912395633  
**Customs tariff number** 39269097



**Height** 140 mm  
**Width** 140 mm  
**Length** 400- 1499 mm  
**Diameter** 140 mm  
**Deflection zone** 100 mm

**Net weight**

**Material** Polyethylene  
**Color** Yellow (like RAL 1018 traffic yellow) / black


**Indoor use** Yes

**Outdoor use** Yes

**Boreholes** 2


**Fixing** The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

**Fixing dimensions** M12X85

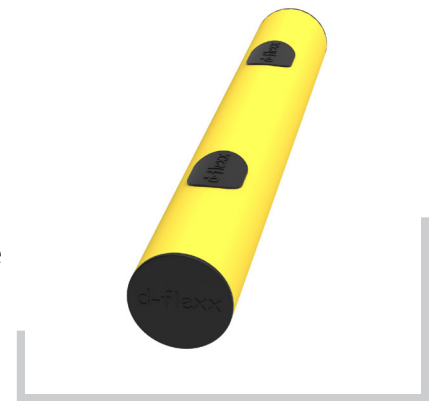

**Material Properties**

**Chemical Resistance** high- ISO/TR 10358  
**Temperature Range** -10° up to + 50°

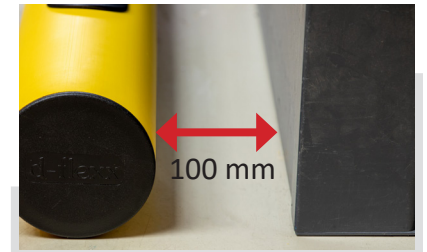


**Environment**

**Recyclability** 100%

**Other**

**Standard Warranty** 5 years

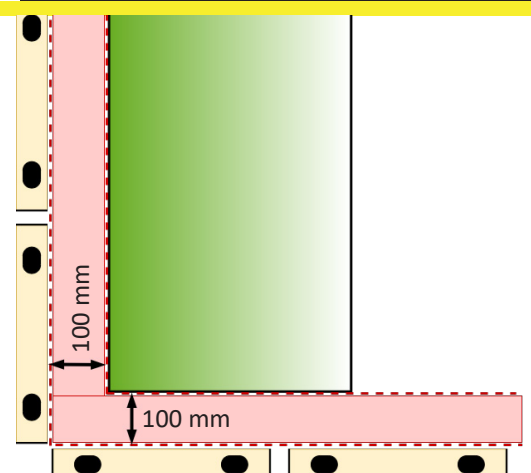

**Article description** Kerb Barrier individual length 1500- 2000 mm  
**Item number** DFKB-I2  
**EAN** 4250912395640  
**Customs tariff number** 39269097



**Height** 140 mm  
**Width** 140 mm  
**Length** 1500- 2000 mm  
**Diameter** 140 mm  
**Deflection zone** 100 mm

**Net weight**

**Material** Polyethylene  
**Color** Yellow (like RAL 1018 traffic yellow) / black


**Indoor use** Yes

**Outdoor use** Yes

**Boreholes** 3

**Fixing** The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

**Fixing dimensions** M12X85

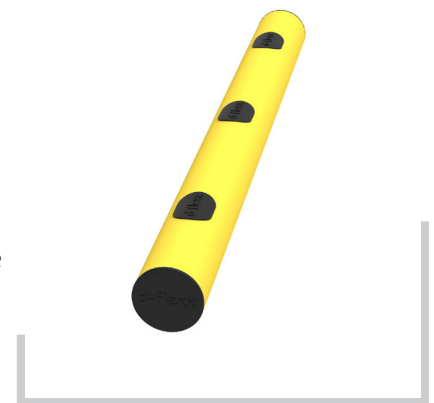

**Material Properties**



**Chemical Resistance** high- ISO/TR 10358  
**Temperature Range** -10° up to + 50°

**Environment**

**Recyclability** 100%

**Other**

**Standard Warranty** 5 years

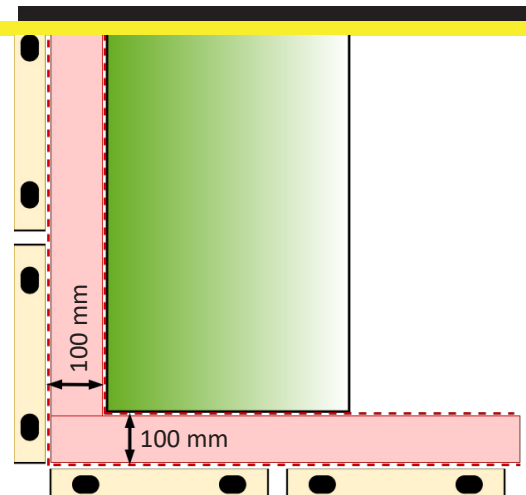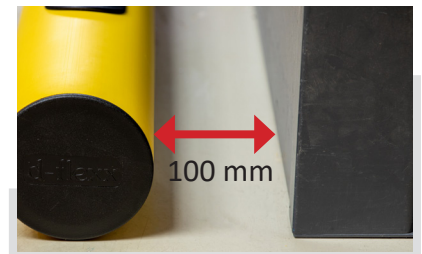



**Article description** Kerb Barrier 500 mm  
**Item number** DFKB-5  
**EAN** 4250912395787  
**Customs tariff number** 39269097



**Height** 140 mm  
**Width** 140 mm  
**Length** 500 mm  
**Diameter** 140 mm  
**Deflection zone** 100 mm


**Net weight** 3,2 kg  
**Material** Polyethylene  
**Color** Yellow (like RAL 1018 traffic yellow) / black  
**Indoor use** Yes  
**Outdoor use** Yes  
**Boreholes** 2  
**Fixing** The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

**Fixing dimensions** M12X85



**Material Properties**

**Chemical Resistance** high- ISO/TR 10358  
**Temperature Range** -10° up to + 50°

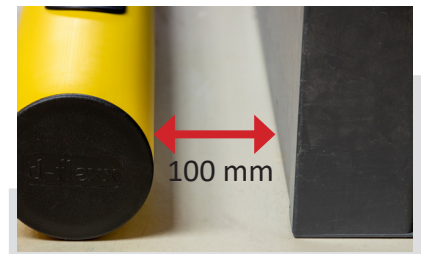

**Environment**

**Recyclability** 100%

**Other**

**Standard Warranty** 5 years

