




tension, even after safety padlocks have been applied.


Opening the control lever releases the lockout

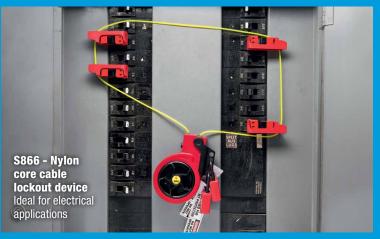

Four 10mm lock holes allow for safety padlocks and

hasps to secure the device during lockout

Retractable Cable Lockout Devices for a Variety of Applications

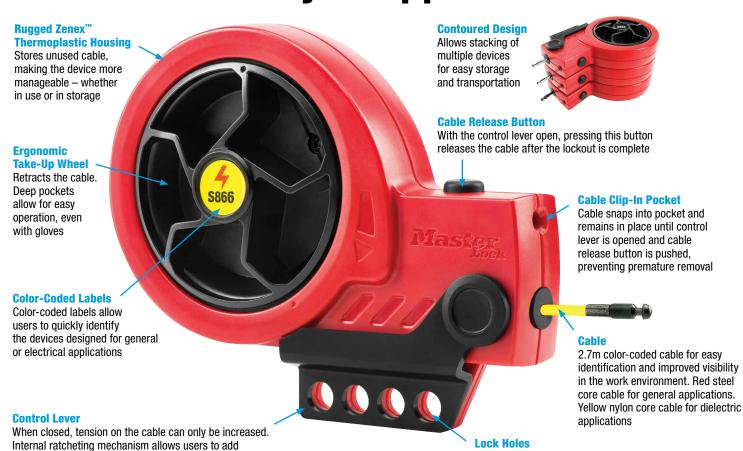




Adjustable Cable Lockout Devices with Cable Management System

	S856	S866
Housing Material	Zenex [™] /PC-PBT Thermoplastic	
Cable Color	Red	Yellow
Cable Core Material	Stranded Steel	Nylon
Cable Sleeve Material	Thermoplastic Polyurethane	
Cable Length	2.7m	
Cable Diameter	3.3mm	
Cable Tip Material	Chrome- Plated Stainless Steel	Stainless Steel with Black Phosphate Finish
Cable Tip Diameter	4.8mm	
Lock Hole Diameter	10mm	



Learn more at masterlock.eu

Additional Products



Replacement Cable Kits for S856 & S866

- Replace cable as needed
- Interchange cable to convert device for use on other applications



S143 "Warning" Labels for S856 & S866

- Includes write-on label with international warning symbol and standard trilingual label in English/ French/Spanish
- 11 additional languages available

Master Lock

www.masterlock.eu

MASTER LOCK EUROPE S.A.S Tel:+33.1.41.43.72.00 - Fax:+33.1.41.43.72.04 E-mail:safetyeu@mlock.com